

IES 4422N LED HEAD

PRELIMINARY SHORTFORM DATA

Modular LED Head for high speed video.




(a mounting plate for a double array is also shown from its backside)


- ▶ 12000 lm
- ▶ Selectable illumination angles 27° , 35° , 60° , 120°
- ▶ Mounting plates for double and quad arrays available
- ▶ Dimensions 79 x 65 x 23 mm³ / 3.1" x 2.6" x 0.9"



Mount Information

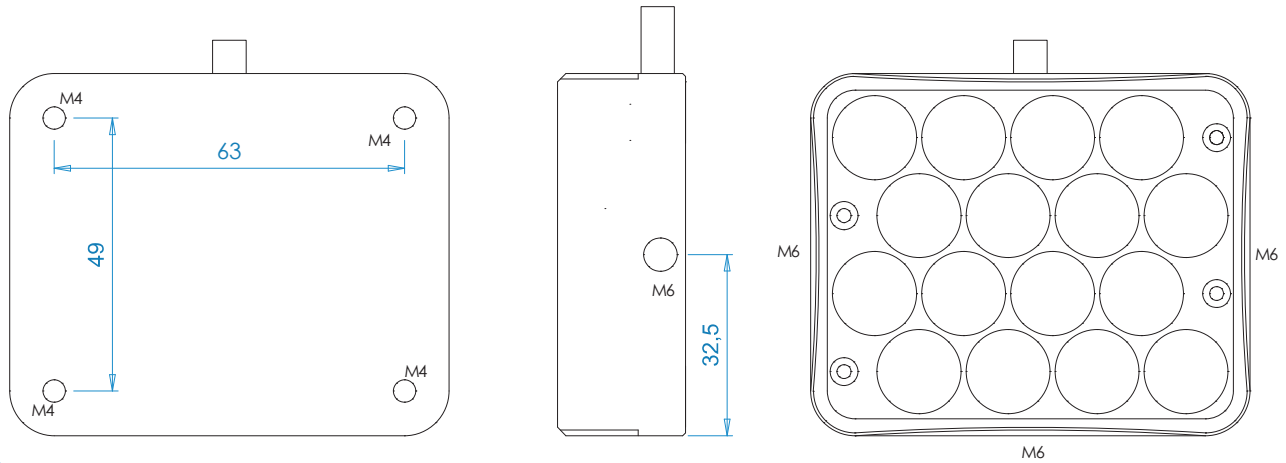

LED-Head

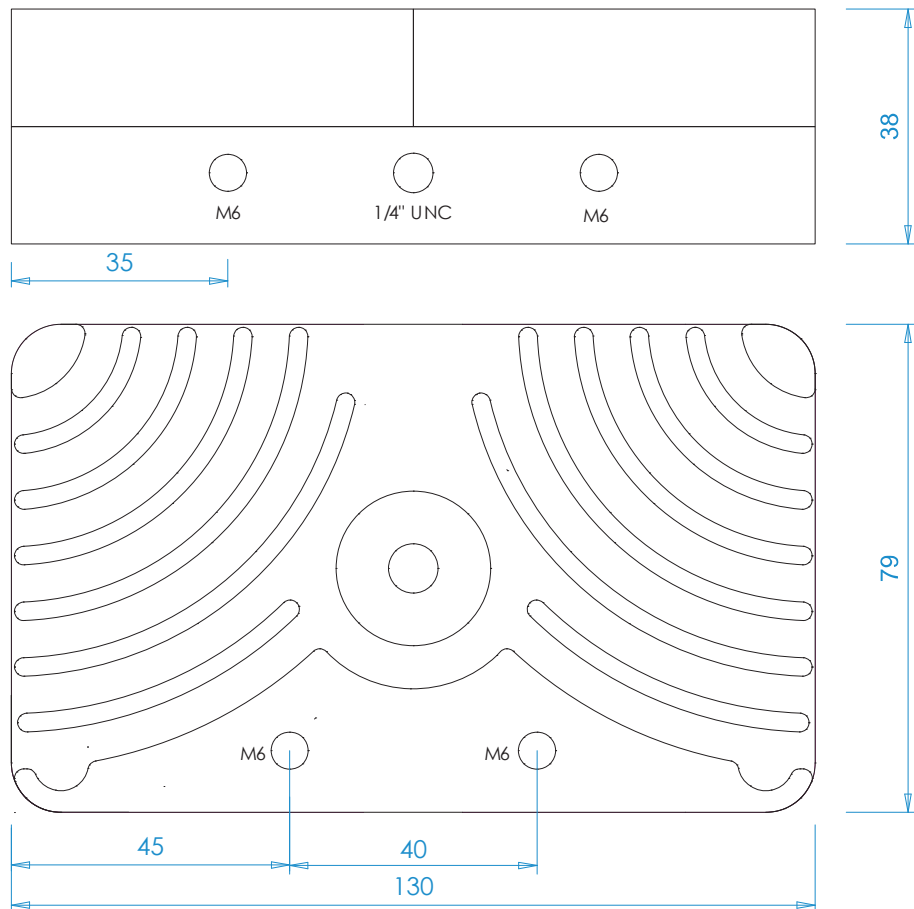

Mount plate for dual array



SPECIFICATIONS

Metrics	
Dimensions	79 x 65 x 23 mm ³ / 3.1" x 2.6" x 0.9"
Weight	0.25 kg / 0.55 lb

Environment	
Temperature range	-20°C ... +70°C
Acceleration	100 g.

Electrical Interface	
Connector	Lemo 1B.306
Cable	0.5 m cable

Illumination Parameters	
Illumination angle	27° , 35° , 60° , 120°
Lumen output	12000 lm

Ordering information: IES 4422N

Also available:

IES 4421 LED head 24000 lm
IES 4422 LED head 12000 lm
IES 4423 LED head 24000 lm
IES 4425 LED head 48000 lm