


IES 1402


Dual Axis Tilt Sensor

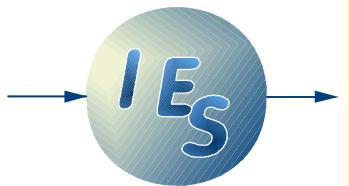

PRELIMINARY SHORTFORM DATA

Dual axis very small and light-weight tilt sensor with digital readout intended for integration into crash test dummies or other testing equipment.

- ☺ **Dimensions 25 x 12 x 10 mm³**
- ☺ **Mass only 5 grams**
- ☺ **Measuring range +/- 80°**
- ☺ **Measuring resolution 0.1°**
- ☺ **Built in temperature measurement with 0.1°C resolution**
- ☺ **Very little power dissipation**
- ☺ **Digital bus interface shared between all members of 1401-Family**
- ☺ **Graphical tilt display with pocket PC or PC**

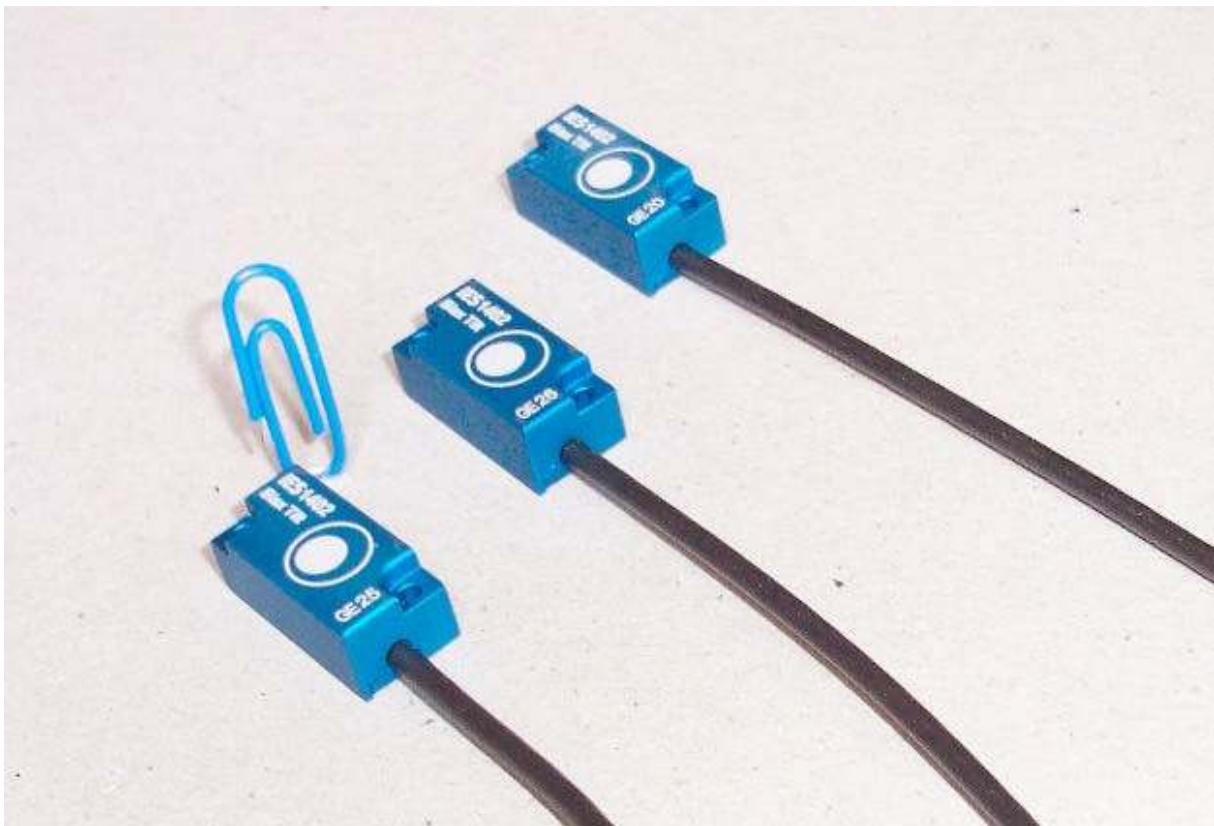

Specifications

Metrics	
Dimensions	25 x 12 x 10 mm ³
Weight	5 grams plus cable
Cable	1.5 m long, black PUR, 3-pole Lemo 0B connector, custom cable length possible
Mounting screws	max. diameter 2.2 mm (use M2)

Dimensions are in mm

Reference plane

Environment	
Temperature range	operation 0...50 °C, specified performance 15...35 °C
Acceleration	500 g shock proof in any direction

Electrical Interface	
Power supply	5 V, 6 mA
Data transmission	single wire bus with 5 V logic level serial data
TEDS information	bus address, serial number, calibration values, calibration date, measurement location, mount and orientation info

Measurement Performance	
Tilt measurement range	+/- 80°
Tilt measurement resolution	0.1°
Noise	<0.05° rms
Tilt repeatability	0.1°
Nonlinearity	+/- 0.2° or +/- 1% reading
Temperature induced error	0.1° typ. between 15°C and 35°C under steady state conditions
Temperature measurement range	0 ...50°C
Temperature measurement resolution	0.1°C

Ordering information: IES 1402

Also available:

- IES 1401H Temperature and humidity data logger
- IES 1404 Advanced temperature and humidity data logger
- IES 1401I232 Interface adapter for PC or pocket PC (RS-232 Interface)
- IES 1401IUSB Interface adapter for PC (USB Interface)
- IES TiltView Display- and documentation software for PC or PPC

Information is provided without warranty and is subject to change without notice. We reserve the right to make changes whenever necessary to improve to the product.

Revision 2006-06