


IES 1406 Display for °C and %rH

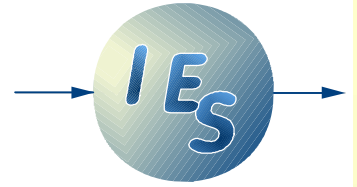

PRELIMINARY SHORTFORM DATA

Display device for IES1404 or IES1401H Temperature and Humidity Loggers. Stationary wall mount for use in dummy service and/or safety test areas. Analog output signal for temperature and humidity allows recording with a DAS. Optional ethernet interface for collection data from various locations.

- ☺ **Dimensions** 115 x 80 x 20 mm³
- ☺ .
- ☺ .
- ☺ .



Specifications

Metrics	
Dimensions	
Weight	
Cable	
Mounting screws	

Environment	
Temperature range	
Acceleration	

Electrical Interface	
Power supply	
Data transmission	
TEDS information	

Measurement Performance	
Temperature measurement range	
Temperature measurement resolution	
Temperature accuracy	
Humidity measurement range	
Humidity measurement resolution	
Humidity accuracy	

Ordering information: IES 1406

Also available:
Option Ethernet Interface

Information is provided without warranty and is subject to change without notice. We reserve the right to make changes whenever necessary to improve to the product.
Revision 2007-10