


# IES 4425-4 LED Head

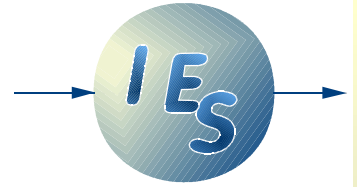

## PRELIMINARY SHORTFORM DATA

Modular LED Head for high speed video.

- ☺ **48000 lm**
- ☺ **Selectable illumination angles**
- ☺ **Modular design for building Arrays**
- ☺ **Dimensions 108 x 108 x 45 mm<sup>3</sup>**
- ☺ **Lilon LED Supply/Controller available**
- ☺ **Ruggedized for onboard and offboard use**



## Specifications

Metrics	
Dimensions	108 x 108 x 45 mm <sup>3</sup>
Weight	1 kg

Environment	
Temperature range	0 ... 50 °C
Acceleration	100 g

Electrical Interface	
Connector	Lemosa FGG.2B.310

Illumination Parameters	
Illumination angle	45° (standard, others on request)

### Ordering information: IES 4425-4

Also available:

- IES 4420 Mini LED Head 12000 lm
- IES 4421 Mini LED Head 24000 lm
- IES 4422 Mini LED Head 12000 lm
- IES 4424 LED Sync Lamp 96000 lm
- IES 4412 Stationary LED Controller
- IES 4414 Onboard LED Controller
- IES 4416 OnBoard LED-Controller