


IES 1410 InDummy Hub for 1400 Family

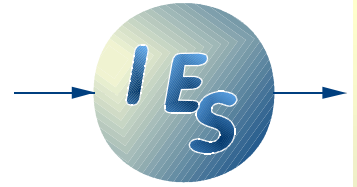

PRELIMINARY SHORTFORM DATA

Simple passive wiring box for tilt sensors and temperature loggers. Additional glue logic for interfacing with DTI or other In-Dummy data acquisition systems available on request.

- ☺ **Dimensions 30 x 26 x 8 mm³**
- ☺ **Very low mass 0.02 kg including connectors**
- ☺ **4 Sensor ports plus one outgoing cable**
- ☺ **Footprint of 1404 logger for easy mount through**



IES Ingenieurbüro für Elektronikentwicklung und Spezialgerätebau

Postanschrift
Volkmaroder Strasse 8A
D-38104 Braunschweig

FON +49 531 701273-0
FAX +49 531 701273-19

Bankverbindung Postbank Hannover
BLZ 250 100 30, Konto 905 693 302
USTIDNr. DE 177335140


Specifications

Metrics	
Dimensions	30 x 26 x 8 mm ³
Weight	0.02 kg (connectors included)

Environment	
Temperature range	0 ... 60°C
Acceleration	200 g

Electrical Interface	
5 Places of Pin-Headers	Harwin M22, 6 pins, keyed

Pin	Signal	Color
1	+5V	red
2	n.c.	(white)
3	SIG	green
4	Cable screen	screen
5	GND	blue
6	key pin	

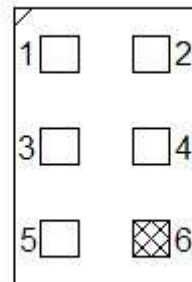

Ordering information: IES 1410

Also available:

- IES 1402 Tilt sensor
- IES 1404 Temperature and humidity logger
- IES 1400iUSB USB interface
- IES TiltView Application software
- IES 1408 Wireless ATD monitor

Information is provided without warranty and is subject to change without notice. We reserve the right to make changes whenever necessary to improve to the product.

Revision 2010-05